


835KTA.1-I780



Linear projectors with symmetrical light distribution to achieve an effective accent, task or general lighting.
Linear fixture in 1128mm length and in a width of 44mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
PMMA optics for controlling and directing the light.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI/DSI.
Passive temperature management.
Ceiling or wall installation with adjustable fixing brackets.
Other options available:
Recessed.
Frameless recessed.
Surface-mounted.
Pendant.
Wall-mounted.

Light source power: 13 W
Fixture power: 14.21 W
Constant Current: 150 mA
Luminous flux of the light source: 2405lm
Luminous flux of the fixture: 2236lm
CRI: 80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 43°
LOR: 93%
Average Service Life: 50000h
LED reliability: >60000h L80B10
UGR: <19 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.3m
Photobiological safety group: 1
Cd/Klm: 704
Luminous efficacy: 157 lm/W
Imax: 1692 Cd

This product contains a light source of energy efficiency class C

Electronic Equipment



S: On/Off
D: DALI-2/DSI/switchDIM
SE: On/Off + 3 hours battery
DE: DALI-2/DSI/switchDIM+3 hours battery
DDE: DALI-2/DSI/switchDIM+3 hours battery (DALI)
There are available accessories for dimming devices.

*Add the suffix **-S, -D, -SE, -DE, -DDE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable

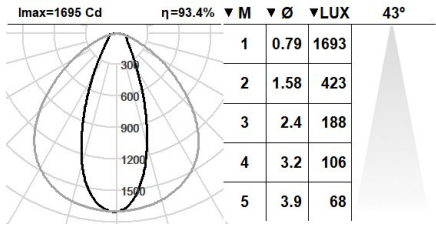

Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com