


156TRT.1-I617



IP40

650°



Recessed linear downlights with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 1406mm length and in a width of 40mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Opal extruded polycarbonate diffuser.
Highly efficient linear printed circuit board.
Accessories available to create customized linear systems.
Built-in driver, included. Tunable White: 2700K - 6500K.
Electronic options for lighting control: DALI/DSI.
Emergency kit as option.
Passive temperature management.
Ceiling-mounted using galvanized steel support with screws.
It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 59.7 W

Fixture power: 59.7 W

Luminous flux of the light source: 7500lm

Luminous flux of the fixture: 4350lm

CRI: >90


Colour Temperature: 2700K - 6500K

Beam Angle: 84°

Average Service Life: 50000h

Photobiological safety group: 1

This product contains a light source of energy efficiency class F

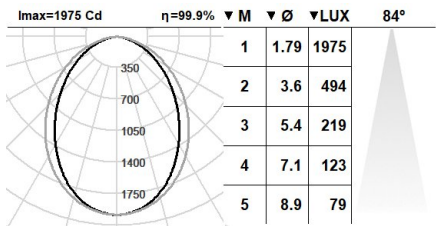

Electronic Equipment



T: DALI-2/DSI/SwitchDIM/ColourSwitch
There are available accessories for dimming devices.

*Add the suffix **-T** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 29.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com