


455TRT.1-I616



Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 1126mm length and in a width of 40mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Opal extruded polycarbonate diffuser.
Highly efficient linear printed circuit board.
Accessories available to create customized linear systems.
Built-in driver, included. Tunable White: 2700K - 6500K.
Electronic options for lighting control: DALI/DSI.
3 hours battery available as option.
Passive temperature management.
Ceiling-mounted with adjustable steel wire suspensoin (1m) and transparent electrical wire. Different suspensoin length on request.
It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 48.1 W
Fixture power: 48.1 W
Luminous flux of the light source: 6000lm
Luminous flux of the fixture: 3480lm
CRI: >90
Colour Temperature: 2700K - 6500K
Beam Angle: 84°
Average Service Life: 50000h
Photobiological safety group: 1
This product contains a light source of energy efficiency class F

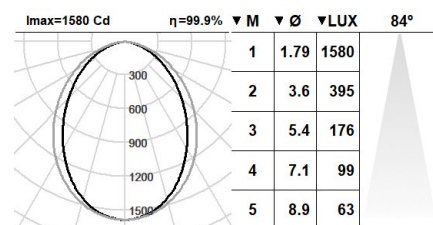

Electronic Equipment

T: DALI-2/DSI SwitchDIM/ColourSwitch

*Add the suffix **-T** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com