


459TRT.1-I636



Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 2806mm length and in a width of 40mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Opal extruded polycarbonate diffuser.
Highly efficient linear printed circuit board.
Accessories available to create customized linear systems.
Built-in driver, included. Tunable White: 2700K - 6500K.
Electronic options for lighting control: DALI-2.
3 hours battery available as option.
Passive temperature management.
Ceiling-mounted with adjustable steel wire suspensor (1m) and transparent electrical wire. Different suspensor length on request.
It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 154 W
Luminaire connected power: 154 W
Light source luminous flux: 15000lm
Luminaire luminous flux: 8700lm
CRI: >90
Colour Temperature: 2700K - 6500K
Beam Angle: 84°
Average Service Life: 50000h
Photobiological safety group: 1
This product contains a light source of energy efficiency class F

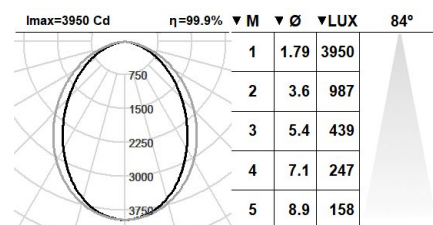

Electronic Equipment

T: DALI-2/switchDIM/ColourSwitch

*Add the suffix **-T** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 26.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com