BARIS 600 IP54 Wall mounted linear fixtures



100°


411

103

46

26

16.4

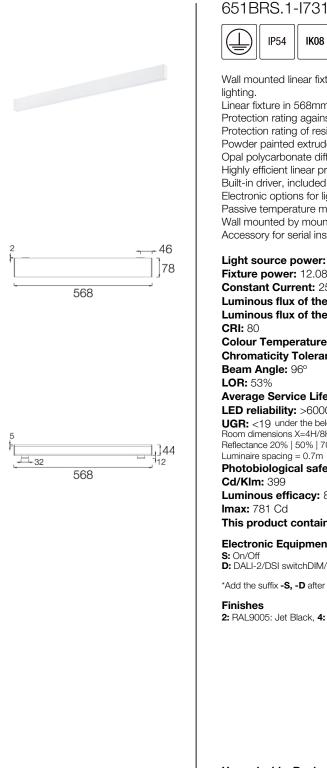

<u>*</u> * Wall mounted linear fixtures with symmetrical light distribution to achieve an effective task or general lighting. Linear fixture in 568mm length and in a width of 44mm. Protection rating against dust and moisture: complete IP54. Protection rating of resistance to harmful mechanical impacts: IK08. Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Opal polycarbonate diffuser. Highly efficient linear printed circuit board. Built-in driver, included. Electronic options for lighting control: DALI/DSI. Passive temperature management. Wall mounted by mounting brackets. Accessory for serial installation, reference F3.L6.BRS. Light source power: 11 W Imax=413 Cd η=100.0% ▼M ▼Ø ▼LUX Fixture power: 12.08 W 1 2.4 Constant Current: 250 mA 2 4.8 Luminous flux of the light source: 1960lm 160 Luminous flux of the fixture: 1038lm 3 7.2 **CRI:** 80 4 9.6 Colour Temperature: 3000K Chromaticity Tolerance: MacAdam 3 5 12.0 Beam Angle: 96° LOR: 53% Average Service Life: 50000h LED reliability: >60000h L80B10 UGR: <19 under the below indicated parameters Room dimensions X=4H/8H Reflectance 20% | 50% | 70% Luminaire spacing = 0.7m Photobiological safety group: 1 Cd/Klm: 399 Luminous efficacy: 86 lm/W Imax: 781 Cd This product contains a light source of energy efficiency class C **Electronic Equipment** S: On/Off D: DALI-2/DSI switchDIM/corridorFUNCTION *Add the suffix -S, -D after the reference to indicate your electronic equipment choice. Finishes 2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

+RAL

IK08

IP54

650°

Upgradeable, Replaceable, Repairable



Note

5 years guarantee

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Contact Ronda de la Font Grossa, 15

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com