
GOWEL 400 IP20 Pendant linear downlights





401GWL.1-I734

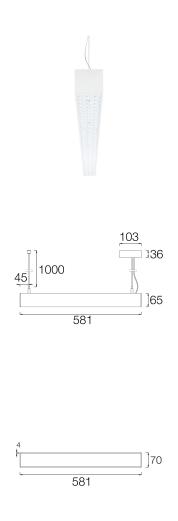

Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 581mm length and in a width of 70mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Range of PMMA optics to achieve specific photometric results.

Highly efficient linear printed circuit board.

Accessories available to create customized linear systems.

Built-in driver, included.


Electronic options for lighting control: DALI-2.

Passive temperature management.

Ceiling-mounted with adjustable steel wire suspension (1m) and transparent electrical wire. Different suspension length on request.

It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 9 W Luminaire connected power: 11.84 W Constant Current: 150 mA Light source luminous flux: 1710lm Luminaire luminous flux: 1556lm **CRI:** 80 Colour Temperature: 4000K Chromaticity Tolerance: MacAdam 3 Beam Angle: 17° LOR: 91% Average Service Life: 50000h LED reliability: >54000h L80B10 **UGR:** <19 Photobiological safety group: 1



This product contains a light source of energy efficiency class C

Electronic Equipment S: On/Off

Cd/Klm: 6350

Imax: 10859 Cd

D: DALI-2/switchDIM/corridorFUNCTION

Luminaire efficiency: 131 lm/W

*Add the suffix -S, -D after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 26.04.2024]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

Ronda de la Font Grossa, 15

08540 Centelles | Barcelona

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com