


401GWL.1-I769



Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 581mm length and in a width of 70mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.

Range of PMMA optics to achieve specific photometric results.

Highly efficient linear printed circuit board.

Accessories available to create customized linear systems.

Built-in driver, included.

Electronic options for lighting control: DALI/DSI.

Passive temperature management.

Ceiling-mounted with adjustable steel wire suspension (1 m) and transparent electrical wire. Different suspension length on request.

It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 32 W

Fixture power: 36.36 W

Constant Current: 500 mA

Luminous flux of the light source: 4890lm

Luminous flux of the fixture: 4450lm

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 17°

LOR: 91%

Average Service Life: 50000h

LED reliability: >54000h L80B10

UGR: <19 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.3m


Photobiological safety group: 1

Cd/Klm: 6350

Luminous efficacy: 122 lm/W

Imax: 31052 Cd

This product contains a light source of energy efficiency class D

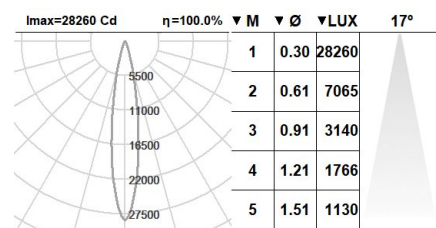

Electronic Equipment

S: On/Off

D: DALI-2/DSI/switchDIM


There are accessories available for dimming devices.

*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com