



801GWL.1-1755



Linear projectors with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 581mm length and in a width of 70mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Range of PMMA optics to achieve specific photometric results.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI/DSI.
Passive temperature management.
Ceiling or wall mounted using adjustable supports.
Matching products:
GOWEL 100 recessed with frame.
GOWEL 200 frameless recessed.
GOWEL 300 surface mounted.
GOWEL 400 pendant.

Light source power: 19 W
Fixture power: 22.35 W
Constant Current: 300 mA
Luminous flux of the light source: 3280lm
Luminous flux of the fixture: 2985lm
CRI: 80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 17°
LOR: 91%
Average Service Life: 50000h
LED reliability: >54000h L80B10
UGR: <19
Photobiological safety group: 1
Cd/Klm: 6350
Luminous efficacy: 134 lm/W
Imax: 20828 Cd
This product contains a light source of energy efficiency class C

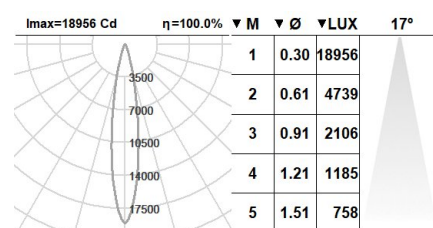


Electronic Equipment

S: On/Off
D: DALI-2/DSI/switchDIM
There are accessories available for dimming devices.
*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 29.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com