


101SSQ.1.01-R620



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent.  
Passive temperature management: heat dissipation flows through an aluminium heat sink.  
Ceiling-mounted by spring clamps for easy installation.

**Light source power:** 6.6 W  
**Fixture power:** 7.69 W  
**Constant Current:** 200 mA  
**Luminous flux of the light source:** 720lm  
**Luminous flux of the fixture:** 720lm  
**CRI:** >90  
**Colour Temperature:** 4000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 24°  
**LOR:** 100%  
**Average Service Life:** 50000h  
**LED reliability:** >50000h L70B50  
**UGR:** <16  
**Photobiological safety group:** 1  
**Cd/Klm:** 3767  
**Luminous efficacy:** 94 lm/W  
**Imax:** 2712 Cd  
**This product contains a light source of energy efficiency class F**

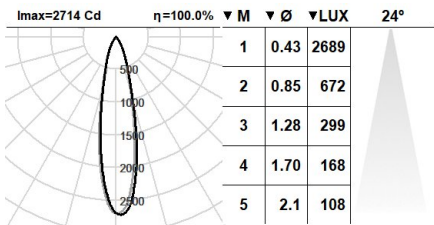

**Electronic Equipment**  
**K:** On/Off (basic)  
**S:** On/Off (AC/DC)  
**SE:** On/Off (AC/DC) + Battery 3h  
**D:** DALI-2/DSI switchDIM/corridorFUNCTION  
**DE:** DALI-2/DSI switchDIM + 3h battery  
**B:** Bluetooth-Casambi

\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

**Finishes**  
**2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

5 years guarantee

**CE**  
BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**  
Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

**Contact**  
T. +34 93 881 35 12    info@rovasi.com  
T. +34 93 881 37 13    **www.rovasi.com**