




111MOV.1-R1111



Recessed spots with symmetrical light distribution to achieve an effective task, accent or general lighting. Cylindrical design in diameter 140 mm.  
Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.  
Faceted metalized or sandblasted metalized aluminium reflector.  
Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.  
Die-cast aluminium recessed base supplied with the same finish as the light fixture.  
Optional anti-glare accessories for more visual comfort.  
Remote driver included.  
Passive temperature management: heat dissipation flows through aluminium heat sink.  
Mounted to the ceiling by two fixing points.

**Light source power:** 30 W  
**Fixture power:** 33.05 W  
**Constant Current:** 900 mA  
**Luminous flux of the light source:** 5120lm  
**Luminous flux of the fixture:** 4659lm  
**CRI:** >80  
**Colour Temperature:** 3000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 12°  
**LOR:** 91%  
**Average Service Life:** 50000h  
**LED reliability:** 50000h L90B10  
**UGR:** <19  
**Photobiological safety group:** 1  
**Luminous efficacy:** 141 lm/W  
**This product contains a light source of energy efficiency class D**

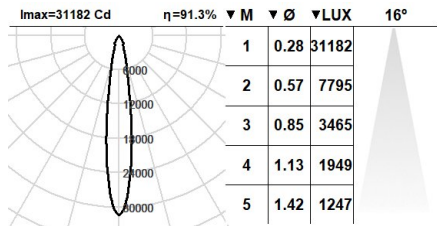


Electronic Equipment

**S:** On/Off (AC/DC)  
**K:** On/Off (basic)  
**D:** DALI-2/DSI/switchDIM/corridorFUNCTION  
**B:** Bluetooth-Casambi  
**SE:** On/Off (AC/DC) + 3 hours battery (class I)(embedding diameter battery >84mm)  
**DE:** DALI-2/DSI/switchDIM/corridorFUNCTION + 3 hours battery (class I)(embedding diameter battery >84mm)  
There are accessories available for dimming devices.  
\*Add the suffix **-S, -K, -D, -B, -SE, -DE** after the reference to indicate your electronic equipment choice.

Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 29.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**  
Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

**Contact**  
T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 www.rovasi.com